


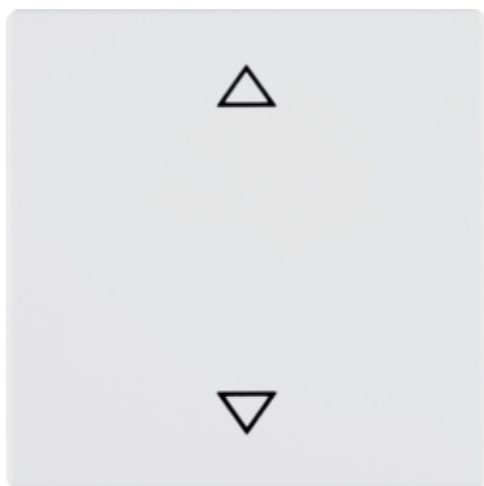

HBNet F-TA 1k JAL Q1 P-W GLÄ

Similar image
(Picture shows 85245229)

Functions

- ETS additional functions: +6 scenes, operating mode, status display, 2 x alarm
- Party function, no execution of automatic, radio and extension unit commands (lock-out protection)
- Configurable transmission and/or reception behaviour
- Memory function for automatic execution of learned up and down times with position
- reset function (to factory setting)
- easy additional functions: +6 scenes, 1 up/down operating mode
- slat position storable for scene
- scene opening via KNX radio appliances
- quicklink functions: blind, 2 scenes, memory, forced control, up/down push-button

Controls and indicators

- activation of the party function using buttons in up and down direction > 20 sec.
- with configuration and function button

Connectivity

Radio protocol	KNX Radio
----------------	-----------

Frequency

Radio transmission/reception frequency	868,3 MHz
--	-----------

Power

Radio transmission power	< 10 mW
- low intrinsic energy requirement	

Measurement

Relative humidity (without condensation)	0 65 % (without condensation)
--	-------------------------------

Detection

- sun protection and twilight-controlled lowering with radio brightness sensor

Materials

RAL colour	RAL 9010 - Pure white
Colour of design line	polar white
Material	thermoplastic
Surface appearance	velvety

LED control

- with status LED for memory and party function, red/orange
- with configuration and function LEDs
- with indicator LED for lock-out protection
- LED application module/insert compatibility display

Connection

- integration in the KNX radio/TP gateway, surface-mounted, into the KNX TP system

Settings

- toolless quicklink configuration using buttons and LED display

Equipment

Number of radio channels	1
Number of quicklink links	max. 20 transmitter/receiver

Safety

- with dismantling protection

Use conditions

Operating temperature	-5 45 °C
-----------------------	----------

Identification

Application, usage	Blind control, KNX radio- operating systems
Secondary design line(s)	Berker Q.1, Berker Q.3, Berker Q.7, Berker Q.9