


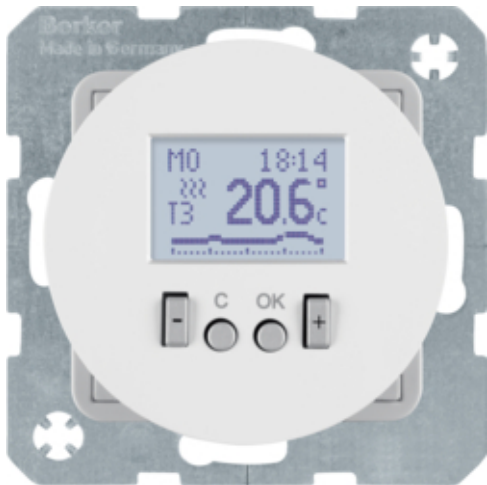

20452089

RTR ZGS M Z-ST R.1 P-W

Functions

- with frost protection function
- with keylock
- with switchover manual/automatic mode

Controls and indicators

- operating languages adjustable: German, English, Dutch, Italian or French
- large, backlight display with text display

Main electrical features

Rated voltage	230 V AC
---------------	----------

Electric current

Switching current	8
-------------------	---

Detection

- with integrated temperature sensor

Materials

Colour of design line	polar white
Colour	polarwhite

Dimensions

Insertion depth	25 mm
-----------------	-------

Installation, mounting

- without spreader claws

Connection

- with screw terminals

Settings

- 3 preset time programmes, individually adjustable
- simple programming of switching times through integrated copy function
- programme memory network failure proved

Equipment

- for heating or cooling mode
- hysteresis, settable

Use

- Time-controlled

Standards

General standards	EN 60730-2-7, 60730-2-9
-------------------	-------------------------

Use conditions

- temperature control range adjustable
- temperature value can be calibrated
- 4 temperature modes selectable
- with thermal return via software

Identification

Application, usage	HVAC control
Main design line	Berker R.1/R.3/R.8
Secondary design line(s)	Berker R.1, Berker R.3